

MV-AC10G-RJ45s-RJ45-HF

RJ45 High-Flex 10 GigE Cable

RJ45 high-flex 10 GigE cable can be used for data transmission of 10 GigE interface cameras, and it is available in various lengths.




Available Product

Hikrobot RJ45 10 GigE industrial cameras

Available Model

- 3 m length: MV-AC10G-RJ45s-RJ45-HF-3m
- 5 m length: MV-AC10G-RJ45s-RJ45-HF-5m
- 10 m length: MV-AC10G-RJ45s-RJ45-HF-10m
- 15 m length: MV-AC10G-RJ45s-RJ45-HF-15m
- 20 m length: MV-AC10G-RJ45s-RJ45-HF-20m

Dimension

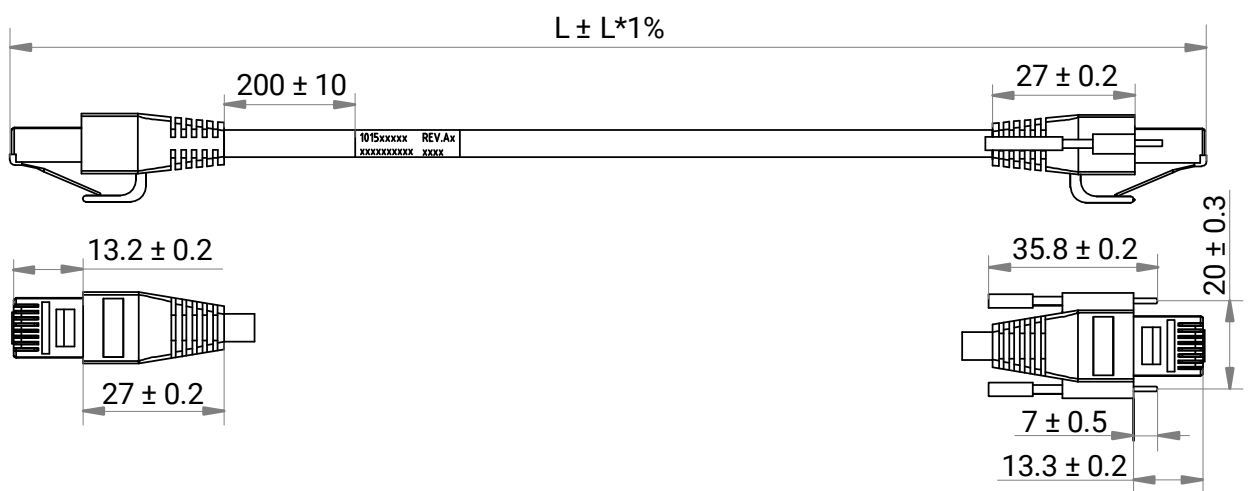

Unit: mm

Specification

Specifications	Model	MV-AC10G-RJ45s-RJ45-HF
		RJ45 High-Flex 10 GigE Cable
Physical specification		
End A connector		RJ45 (with locking stud)
End B connector		RJ45
Cable diameter		7.0 mm
Length		3 m/5 m/10 m/15 m/20 m
Cable mechanical		(26#*1P+AL)*4C+AB
Jacket		PVC
Cable color		Black
Connector durability		> 750 mating cycles
Min. bending radius		84 mm
Applicable scenario		Drag chains
Max. U-type bending cycles		5 million
Electrical specification		
Max. voltage		30 VDC
Additional information		
Working temperature		-20 °C to 75 °C (-4 °F to 167 °F)
Certification		RoHS, UL
Packaging		Individual package

Note: Read the camera user manual before connecting the cable to the camera.