

MV-ACP-H6p(left)-open-ST-*m

6-Pin P7 Standard (Left Side) Power & I/O Cable

The 6-pin P7 standard (left side) power & I/O cable can be used to power the camera, I/O signal wiring, and is available in a variety of lengths.




Applicable Product

Hikrobot 6-pin P7 Power and I/O Interface Industrial Camera

Available Model

- 3 m length: MV-ACP-H6p(left)-open-ST-3m
- 5m length: MV-ACP-H6p(left)-open-ST-5m
- 15m length: MV-ACP-H6p(left)-open-ST-15m

Dimension

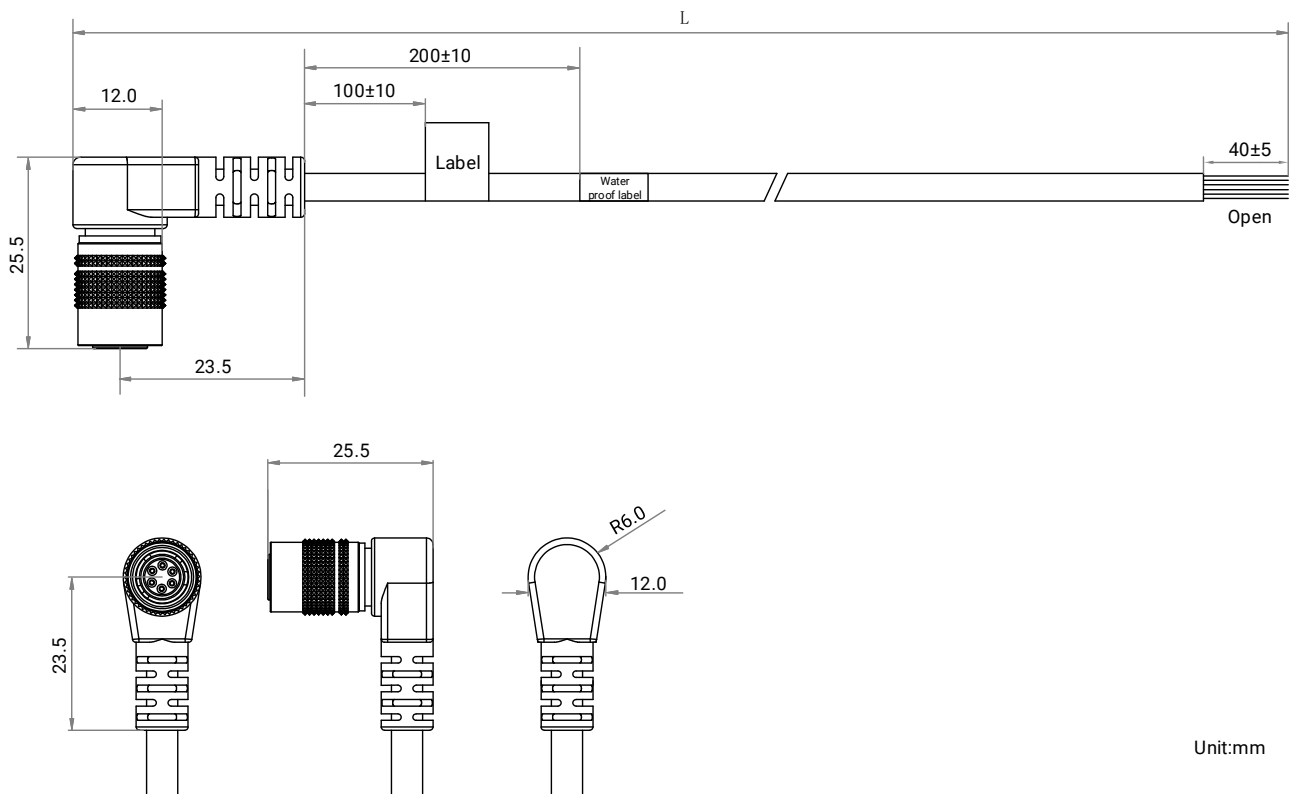

Interface Definition

Pin	Wire Color
1	Orange
2	Yellow
3	Purple
4	Blue
5	Green
6	Gray

Specification

Model	MV-ACP-H6p(left)-open-ST-*m
Specifications	6-pin P7 Standard (Left side) Power & I/O Cable
Physical specification	
End A connector	P7 6-pin, female, left side
End B connector	Open
Cable diameter	5.0 mm
Length	3/5/15 m
Cable mechanical	26#×2P+26#×2C+AB
Jacket	PVC
Cable color	Black
Connector model	Made in China
Connector durability	≥750 cycles
Min. bending radius	60 mm
Applicable scenario	Static scenes
Electrical specification	
Max. voltage	30 VDC
Additional information	
Working temperature	-20 °C to 75 °C (-4 °F to 167 °F)
Certification	RoHS 2.0, UL
Packaging	Individual package

Note: Read the camera user manual before connecting the cable to the camera.