

MV-ACU3-MBMs-AM-SF

USB 3.0 Super Flex Data Cable

MV-ACU3-MBMs-AM-SF Super Flex Data Cable can be used for data transmission and power supply of USB3.0 interface cameras, and is available in a variety of lengths.




Available Products

- Hikrobot USB3.0 Interface Area Scan Camera
- Hikrobot USB3.0 Interface Board Level Camera

Available Models

- 3m USB3.0 Super Flex Data Cable : MV-ACU3-MBMs-AM-SF-3m
- 5m USB3.0 Super Flex Data Cable : MV-ACU3-MBMs-AM-SF-5m
- 7m USB3.0 Super Flex Data Cable : MV-ACU3-MBMs-AM-SF-7m
- 10m USB3.0 Super Flex Data Cable: MV-ACU3-MBMs-AM-SF-10m
- 15m USB3.0 Super Flex Data Cable: MV-ACU3-MBMs-AM-SF-15m
- 20m USB3.0 Super Flex Data Cable: MV-ACU3-MBMs-AM-SF-20m

Dimension

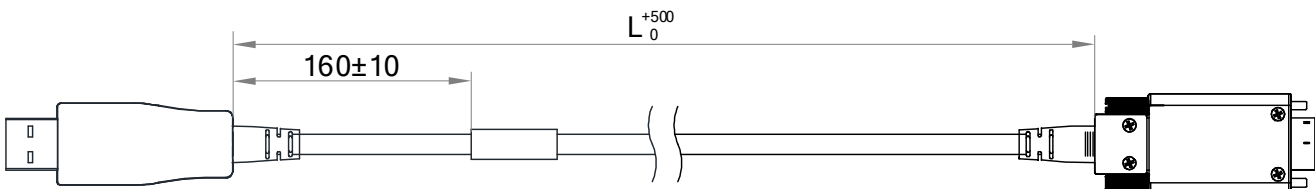

Unit:mm

Specifications

Model	MV-ACU3-MBMs-AM-SF
Parameter	USB 3.0 Super Flex Data Cable
Physical specifications	
End A connector	Micro-B male (with screw)
End B connector	A male
Cable diameter	4.8 mm
Length	3/5/7/10/15/20 m
Cable mechanical	AOC-Hybrid-UG-2A1b+4*20AWG
Jacket	TPU
Cable color	Black
Connector durability	5,000 cycles
Min. bending radius	57.6 mm
Applicable scenario	Static scenes / drag chains
Max. U-type bending cycles	10 million times
Max. ±90° bending cycles	5 million times
Electrical features	
Max. voltage	5 VDC
Additional information	
Working temperature	-20 °C to 80 °C (-4 °F to 176 °F)
Certification	RoHS, UL
Packaging	Individual package

**Read the user manual for the camera including the precautions before connecting the cable to the camera.*