

## MV-ACXP6-DIN-HDBNC-HF-\*m

### CXP-6 High-Flex Data Cable

The CXP-6 high-flex data cable can be used for data transmission of cameras with CoaXPress interface, and is available in a variety of lengths.

### Applicable Camera


Hikrobot industrial camera with CoaXPress interface.



### Available Model

- 3 m length: MV-ACXP6-DIN-HDBNC-HF-3m
- 5 m length: MV-ACXP6-DIN-HDBNC-HF-5m
- 10 m length: MV-ACXP6-DIN-HDBNC-HF-10m

### Dimension

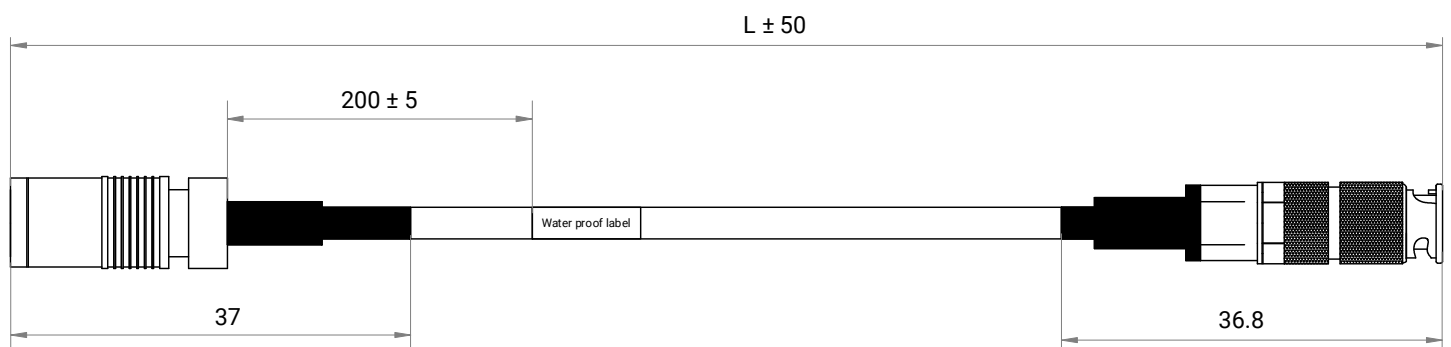

Unit: mm

## Specification

<b>Model</b>	<b>MV-ACXP6-DIN-HDBNC-HF-*m</b>
	<b>CXP-6 High-Flex Data Cable</b>
<b>Specifications</b>	
<b>Physical specification</b>	
<b>End A connector</b>	DIN 1.0/2.3
<b>End B connector</b>	HD-BNC
<b>Cable diameter</b>	5 mm
<b>Length</b>	3 m/5 m /10 m
<b>Cable mechanical</b>	Coaxial
<b>Jacket</b>	PVC
<b>Cable color</b>	Black
<b>Connector durability</b>	500 mating cycles
<b>Min. bending radius</b>	60 mm
<b>Applicable scenario</b>	Drag chain
<b>Max. U-type bending cycles</b>	2 million times
<b>Electrical specification</b>	
<b>Max. voltage</b>	300 VDC
<b>Additional information</b>	
<b>Working temperature</b>	-30 °C to 80 °C (-22 °F to 176 °F)
<b>Certification</b>	RoHS, UL
<b>Packaging</b>	Individual package

Note: Read the camera user manual before connecting the cable to the camera.