

MV-CH1010-10CM/CC

101 MP CMOS Camera Link Area Scan Camera



GEN<i>CAM



Introduction

MV-CH1010-10CM/CC camera adopts Sony® IMX461 sensor to provide high-quality images. It uses Camera Link interface to transmit non-compressed images in real time, and its max. frame rate can reach 8.1 fps in full resolution.

Key Features

- Supports auto or manual adjustment of gain and exposure time, and manual adjustment of LUT and Gamma correction.
- Supports FFC correction function.
- Provides camera with fan or TEC to meet different working temperature requirements.
- Supports 16-bit ADC output with high acquisition accuracy and wide dynamic range.
- Supports configuration modes of Base, Medium, Full and 80-bit via the Camera Link interface.
- Compatible with Camera Link V2.0 Protocol, GenICam Standard, and the frame grabber software meeting with GenICam Protocol.


Available Model

- Mono camera with fan: MV-CH1010-10CM-M72-NF
- Color camera with fan: MV-CH1010-10CC-M72-NF
- Mono camera with TEC: MV-CH1010-10CM-M72-TF
- Color camera with TEC: MV-CH1010-10CC-M72-TF


Applicable Industry

FPD detection, PCB AOI, file scanning, etc.

Sensor Quantum Efficiency

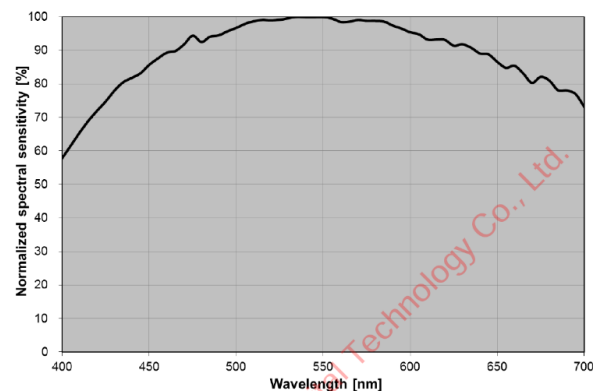

MV-CH1010-10CM

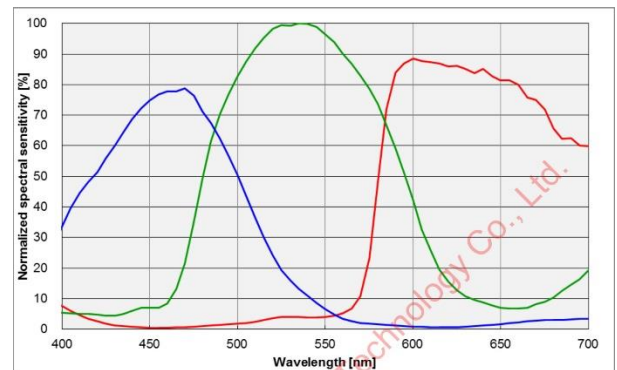


MV-CH1010-10CC

Model	MV-CH1010-10CM	MV-CH1010-10CC
Performance		
Sensor type	CMOS, rolling shutter	
Sensor model	Sony® IMX461	
Pixel size	3.76 μm × 3.76 μm	
Sensor size	55 mm	
Resolution	11648 × 8740	
Max. frame rate	8.1 fps @ 11648 × 8740 Mono 8	8.1 fps @ 11648 × 8740 Bayer RG 8
Configuration mode	Base, Medium, Full, 80-bit	
Tap geometry	2X_1Y, 4X_1Y, 8X_1Y, 10X_1Y	
Tap number	2 Taps, 4 Taps, 8 Taps, 10 Taps	
Pixel clock	40 MHz, 60 MHz, 70 MHz, 85 MHz	
Dynamic range	78 dB	
SNR	45 dB	
Gain	0 dB to 36 dB	
Exposure time	14 μs to 10 sec	
Exposure mode	Off/Once/Continuous exposure mode, supports Global Reset	
Mono/color	Mono	Color
Pixel format	ADC 12-bit mode: Mono 8/10/12 ADC 16-bit mode: Mono 8/10/12/16	ADC 12-bit mode: Bayer RG 8/10/12 ADC 16-bit mode: Bayer RG 8/10/12/16
Binning	Supports 1 × 1, 1 × 2, 1 × 4, 2 × 1, 2 × 2, 2 × 4, 4 × 1, 4 × 2, 4 × 4	
Decimation	Supports 1 × 1, 1 × 2, 1 × 4, 2 × 1, 2 × 2, 2 × 4, 4 × 1, 4 × 2, 4 × 4	
Reverse image	Supports horizontal reverse image output	
Electrical feature		
Data interface	Camera Link with SDR interface	
Digital I/O	12-pin P10 connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2), and RS-232 × 1. Camera Link interface provides I/O (CC1/CC2/CC3/CC4)	
Power supply	Camera with fan: 12 VDC to 24 VDC; Camera with TEC: 24 VDC	
Power consumption	Camera with fan: Typ. 14 W @ 24 VDC Camera with TEC non-cooling: Typ. 14 W @ 24 VDC Camera with TEC cooling: Typ. 48 W @ 24 VDC	Camera with fan: Typ. 11.2 W @ 24 VDC Camera with TEC non-cooling: Typ. 12.5 W @ 24 VDC Camera with TEC cooling: Typ. 49.7 W @ 24 VDC
Mechanical		
Lens mount	M72*0.75, flange back length 19.55 mm	
Dimension	Camera with fan: 90 mm × 90 mm × 71.5 mm (3.5" × 3.5" × 2.8") Camera with TEC: 100 mm × 100 mm × 87.2 mm (3.9" × 3.9" × 3.4")	
Weight	Camera with fan: Approx. 790 g (1.7 lb.) Camera with TEC: Approx. 1.7 kg (3.7 lb.)	
Ingress protection	IP40 (under proper lens installation and wiring)	
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 80 °C (-22 °F to 176 °F)	
Humidity	20% RH to 95% RH (no condensation)	
General		
Client software	MVS or frame grabber software meeting with GenICam Protocol	
Operating system	32/64-bit Windows 7/10, 64-bit Windows 11	
Compatibility	Camera Link V2.0, GenICam	
Certification	CE, RoHS, KC	

Dimension

Camera with fan:

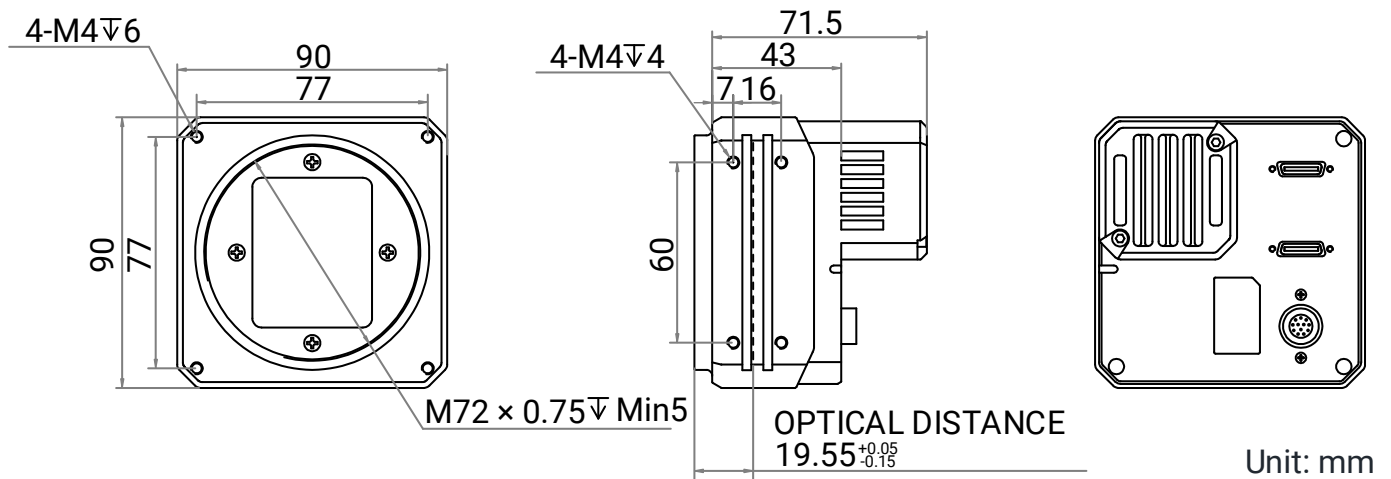

Camera with TEC:

