

# MV-DP2050-01P

## 3D Laser Profile Sensor



### Introduction

With built-in high-accuracy algorithm, image process algorithm of wide dynamic range, and data integration algorithm, MV-DP2050-01P can output high accurate 3D point cloud data in real-time by combining high frame rate chip and accurate laser control. With compact structure, high integration, and easy operation, it is widely applied into consumer electronics, electronics manufacturing, automobile, etc.


### Available Model

MV-DP2050-01P

### Applicable Industry

Consumer electronics, electronics manufacturing, automobile industry, etc.


### Dimension

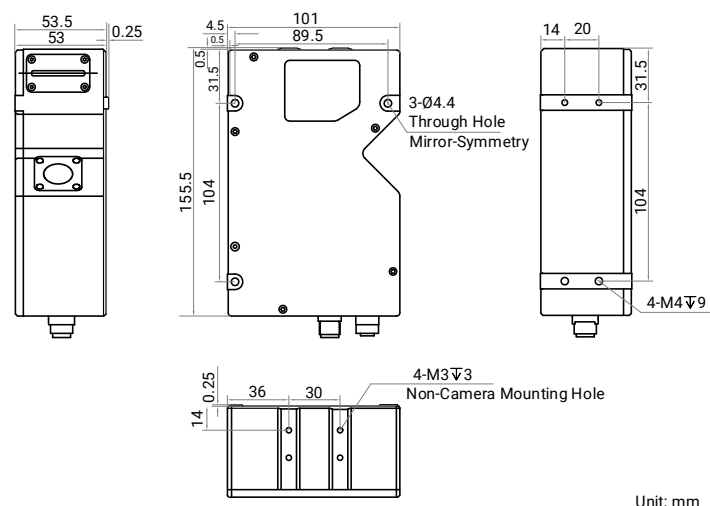

### Key Feature

- Built-in high-accuracy algorithm and accuracy is up to submicron level.
- Adopts high frame rate chip with a maximum scan frame rate of 23.9 kHz.
- Supports multiple exposure modes with good robustness.
- Adopts multiple-frame integration technology to provide complete profiles.
- Provides multiple filter modes with stable data.
- Supports ROI selection and auto setting for easier operation.

### Measurement Range Diagram

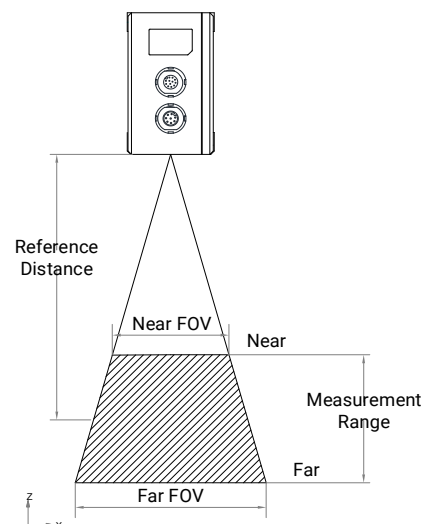

## Specification

	Model	MV-DP2050-01P
Parameter	3D Laser Profile Sensor	
<b>Performance</b>		
Data points/profile	3200	
Reference distance	47 mm	
Measurement range (Z-axis)	6 mm	
Measurement range (X-axis)	30.5 mm @ near field of view 31.5 mm @ reference distance 32.5 mm @ far field of view	
Resolution (Z-axis)	1.58 $\mu\text{m}$ to 1.74 $\mu\text{m}$	
Repeatability (Z-axis)*	0.41 $\mu\text{m}$ @ data that sensor tests gauge block on optical platform	
Linearity Z-axis ( $\pm\%$ of MR)	0.01	
Profile data interval	9.9 $\mu\text{m}$ to 10.4 $\mu\text{m}$	
Scan frame rate	3.3 kHz to 23.9 kHz (high frame rate mode)	
Data output	Original image, profile data, depth image, brightness image	
Trigger mode	Software trigger, hardware trigger (differential encoder)	
Laser safety class	Class 3R	
Laser wavelength	405 nm	
<b>Electrical feature</b>		
Data interface	Gigabit Ethernet (1000 Mbit/s), compatible with Fast Ethernet (100 Mbit/s)	
Digital I/O	12-pin M12 interface provides power and I/O, including opto-isolated input $\times$ 2 (Line 0/9), differential input $\times$ 2 (Line 3/6), and differential output $\times$ 1 (Line 1)	
Power supply	24 VDC	
Power consumption	Typ. 15.2 W @ 24 VDC	
<b>Mechanical</b>		
Dimension	155.5 mm $\times$ 101 mm $\times$ 53.5 mm (6.1" $\times$ 4.0" $\times$ 2.1")	
Weight	Approx. 992 g (2.2 lb.)	
Ingress protection	IP67	
Temperature	Working temperature: 0 $^{\circ}\text{C}$ to 45 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 113 $^{\circ}\text{F}$ ) Storage temperature: -30 $^{\circ}\text{C}$ to 80 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 176 $^{\circ}\text{F}$ )	
Humidity	20% RH to 85% RH (no condensation)	
<b>General</b>		
Client software	3DMVS, VM3D, or third-party software	
Operating system	32/64-bit Windows 7/10, 64-bit Windows 11 (8 GB memory and above, and i5 CPU recommended)	

\*This data is obtained via testing gauge blocks in a laboratory, and it is an average from 4096 tests.