

MV-GS1000

10 GigE Frame Grabber



GEN*i*CAM

10GiGE
VISION

Introduction

MV-GS1000 series 10 GigE frame grabber supports GigE Vision V2.0 protocol, and its SFP interfaces can be connected to 4 cameras at most via its pluggable SFP modules. According to different SFP modules, the frame grabber is applicable to 10 GigE industrial camera with RJ45 port or fiber optic interface.


Available Model

MV-GS1004

Dimension

Key Features

- Supports GigE Vision V2.0 protocol with each channel accessing up to 10 Gbps data transfer speed.
- Various indicators indicate frame grabber status in real time.
- Adopts multiple I/O connectors for input and output.
- Provides SDK for secondary development.
- Complies with GenIcam standard.

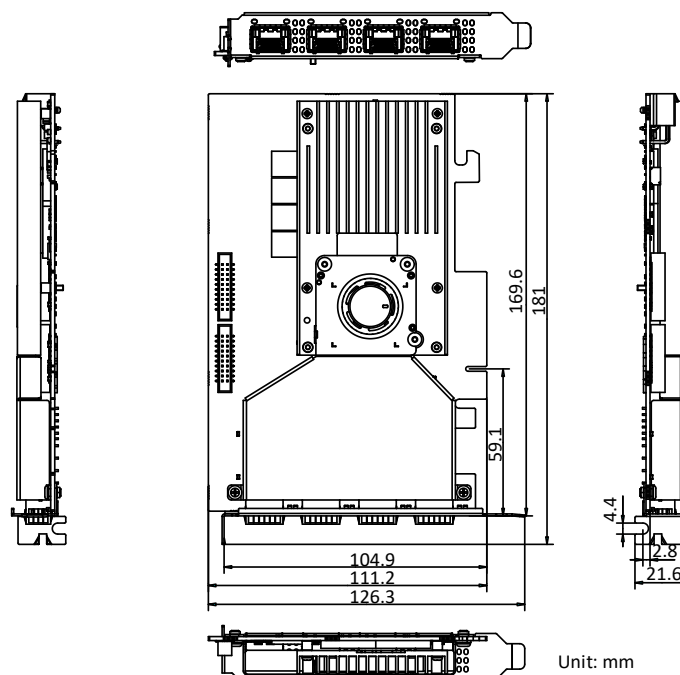

Specification

Model	MV-GS1004
Memory	
On-board memory	2 GB DDR3-RAM
Host interface	
Interconnect	PCI-E gen2 × 8
Delivery bandwidth	3900 MB/s (max. transmission bandwidth) 3350 MB/s (sustained transmission bandwidth)
Indicator	1
Camera interface	
Standard	GigE Vision V2.0
Interface	SFP × 4
Camera type supported	10 GigE industrial camera
Camera quantity supported	4 at most (total bandwidth up to 27 Gbps)
Camera connection speed	10 Gbps
Stream	4
Stream indicator	4 pairs
Processing feature	
Pixel format	Mono 8/10/10p/12/12p Bayer 8/10/10p/12/12p YUV422Packed, YUV422_YUYV_Packed
Jumbo frame	9 KB
GPIO	
I/O Type	Provides 24 I/O connectors, including opto-isolated input × 4 (4.5 VDC to 28 VDC), opto-isolated output × 4 (4.5 VDC to 28 VDC), RX422 input × 4, TX422 output × 4, TTL input × 4, and TTL output × 4
Connector	Female header
Electrical feature	
Power consumption	Typ. 20 W
Mechanical	
Dimension	181 mm × 126.3 mm × 21.6 mm (7.1" × 5.0" × 0.9")
Temperature	Working temperature: 0 °C to 60 °C (32 °F to 140 °F) Storage temperature: -20 °C to 70 °C (-4 °F to 158 °F)
Humidity	10% RH to 95% RH (no condensation)
General	
Client software	MVS
Operating system	Windows 7/10/11, Ubuntu 18.04 to 24.04 on 64-bit Linux
Certification	CE, KC