

MV-LW-H-0**-1-S

Light Source Extension Cable(s)

MV-LW-H-0**-1-S series extension cable(s) is applicable to Hikrobot style light sources.



RoHS

Key Features

- Provides various connector types for various machine vision light source interfaces.
- Various lengths can be selected to meet the installation mode of different distances of the light sources (it should be noted that there is a risk of voltage drop under 30 m distance).


Available Model

1 m, single-channel light source extension cable: MV-LW-H-001-1-S
3 m, single-channel light source extension cable: MV-LW-H-003-1-S
5 m, single-channel light source extension cable: MV-LW-H-005-1-S
7 m, single-channel light source extension cable: MV-LW-H-007-1-S
10 m, single-channel light source extension cable: MV-LW-H-010-1-S
15 m, single-channel light source extension cable: MV-LW-H-015-1-S
20 m, single-channel light source extension cable: MV-LW-H-020-1-S
30 m, single-channel light source extension cable: MV-LW-H-030-1-S

Specification

Model	MV-LW-H-0**-1-S
Parameter	Light Source Extension Cable(s)
Physical specification	
Channel	1
End A connector	SMR-03V-B
End B connector	SMR-03V-BC
Length	1 m/3 m/5 m/7 m/10 m/15 m/20 m/30 m
Cable diameter	Φ5 mm
Cable mechanical	1 m/3 m/5 m/7 m: 24AWG*3C 10 m/15 m/20 m/30 m: 24AWG*2C
Cable jacket	PVC
Max. U-type bending cycles	5 million times
Min. bending radius	60 mm
Connector durability	2000 times
Flame resistance rating	VW-1
Electrical specification	
Insulation	≥ 20 MΩ/KM
Withstand voltage capability	30 V
Mechanical	
Temperature	Working temperature: 0 °C to 80 °C (32 °F to 176 °F) Storage temperature: -20 °C to 80 °C (-4 °F to 176 °F)
Humidity	20% RH to 90% RH (no condensation)
Ingress protection	IP55 (under correct installation)
General	
Certification	RoHS 2.0

Dimension

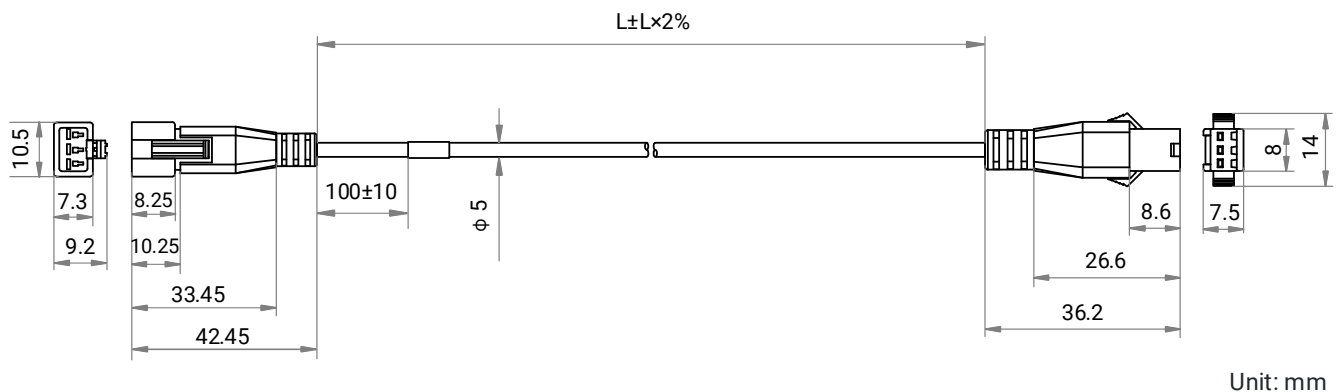

HIKROBOT

Hangzhou Hikrobot Co. Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.